


EUROPA Check valve

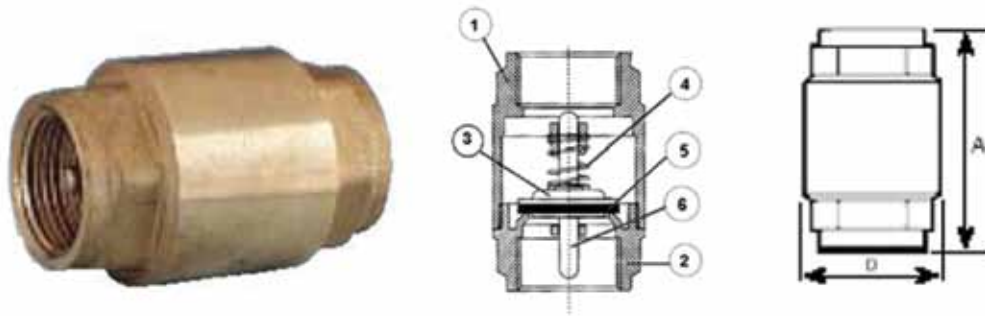

Features

- Check valve PN 25 /12
- Brass according to DIN 17660
- Thread ends gas female-female according to ISO 228/1
- Working temperature: water 0° to 90°C, Gas -20° to 60° C, air -20° á 110°C
- Suitable for industrial, pneumatic, and hydraulic installations, hot/cool water
- It can be fitted in horizontal, vertical or oblique position

General Dimensions

Ref	Size	PN	Dimensions (mm)			Weight (g)
			P	A	D	
3131 03	3/8"	25	10	54	35	175
3131 04	1/2"	25	15	57	35	190
3131 05	3/4"	25	20	64	42	275
3131 06	1"	25	25	75	48	400
3131 07	1 1/4"	18	32	82	61	635
3131 08	1 1/2"	18	40	93	71	850
3131 09	2"	18	50	100	87	1300
3131 10	2 1/2"	12	65	120	120	2740
3131 11	3"	12	80	140	140	4000
3131 12	4"	12	100	158	173	6450