


Stainless steel ball valve – 2 piece – full bore

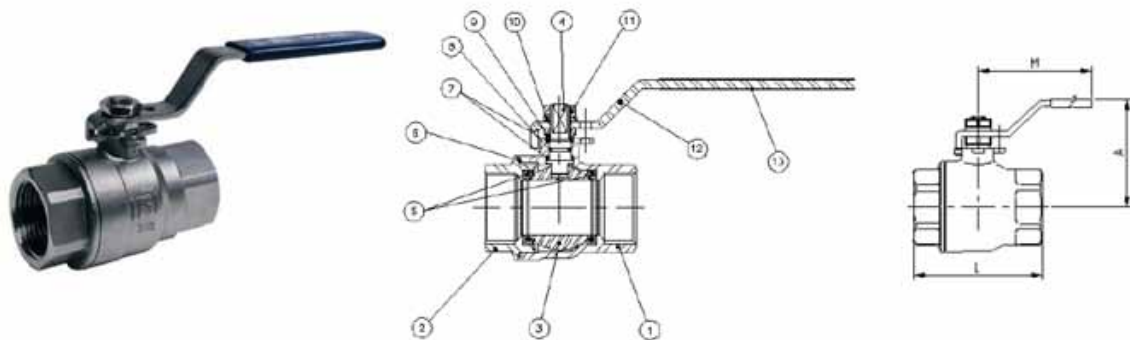

Features

- Stainless steel full port ball valve, two piece
- Thread ends according DIN 2999 standard
- Made of AISI 316 (CF8M)
- Ball seats PTFE + 15 % GF
- Blow-out proof stem
- Viton O'ring stem
- Stem gasket PTFE
- Locking system
- Max working pressure 63 Kg/cm²
- Working Temperature -25 °C + 180 °C

General Dimensions

Ref	Size	PN	Dimensions (mm)				Weight (g)
			P	H	L	M	
2014 02	¼"	63	11	50	50	104	207
2014 03	3/8"	63	12.7	50	50	104	195
2014 04	½"	63	15	51.5	55	104	237
2014 05	¾"	63	20.6	62	70	122	442
2014 06	1"	63	25.4	65	83	122	606
2014 07	1 ¼"	63	31.8	82	91	180	1084
2014 08	1 ½"	63	38.1	88	103	205	1544
2014 09	2"	63	50.8	106	120	219	2648
2014 10	2 ½"	63	65	119	152	240	4707
2014 11	3"	63	80	135	172	275	7288