


Stainless steel ball valve – 3 piece – full bore

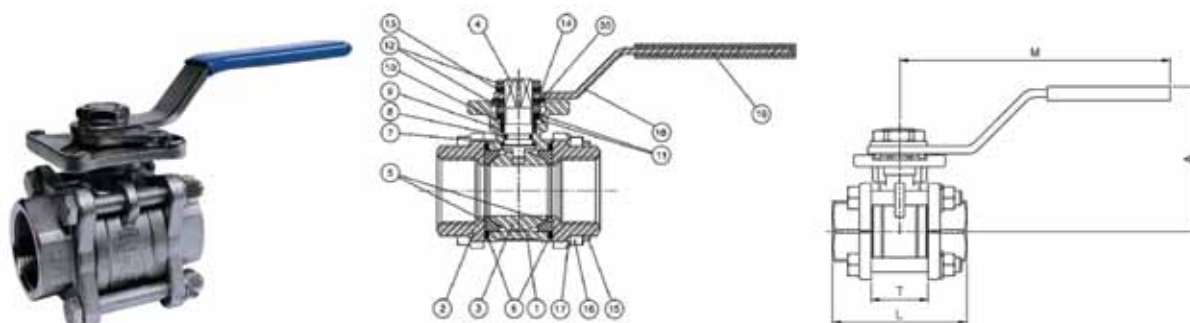

Features

- Stainless steel full port ball valve, 3 pieces
- Thread ends according to DIN 2999 standard
- Made of AISI 316 (CF8M)
- Ball seats PTFE + 15 % GF
- Viton O'ring stem
- Stem gasket PTFE + 15% Graphite
- Locking system
- Direct mounting actuator ISO 5211 (patent system 9900474)
- Blow-out proof stem
- Max.. working pressure 63 Kg/cm²
- Working temperature -25 °C + 180 °C

General Dimensions

Ref	Size	PN	Paso	Dimensions (mm)				Weight (Kg)
				A	L	M	T	
2025 02	¼"	63	11	60	47.6	112	23	0.39
2025 03	3/8"	63	12.7	60	47.6	112	23	0.38
2025 04	½"	63	15	60	56	112	24	0.44
2025 05	¾"	63	20	70	73	138	30	0.82
2025 06	1"	63	25	70	82	138	33.5	1.02
2025 07	1 ¼"	63	32	88	91	160	41.5	1.79
2025 08	1 ½"	63	40	94	104	205	51.5	2.46
2025 09	2"	63	50	100	120	205	63	3.47
2025 10	2 ½"	63	65	150	155	330	83.5	8.50
2025 11	3"	63	80	165	182	330	100	12.40
2025 12	4"	63	100	175	220	340	118.5	19.65