


Butterfly valve – LUG type

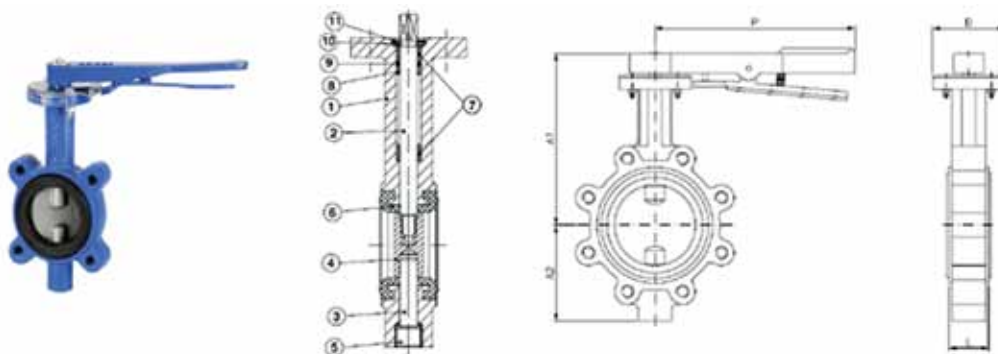

Features

- Butterfly valve LUG type
- GGG-40 Ductil Iron body allows installation in ANSI 125 /150 pipe flange
- EPDM body seat
- Butterfly made in stainless steel 316 (CF8M)
- Actuator mounting plate according ISO 5211 – DIN 3337
- Face-to-face according UNE EN 558-1 Serie 20 (DIN 3202 K1)
- Epoxi painted
- Maximum working pressure 19 Kg/cm²
- Working temperature -20°C + 120 °C

General Dimensions

Ref	Size	L	Dimensions (mm)					Weight (kg)
			A1	A2	D	P	N-M	
2108A 09	2"	43	190	79	90	270	4 X 5/8" - 11	4,800
2108A 10	2 ½"	46	190	93	90	270	4 X 5/8" - 11	5,500
2108A 11	3"	46	195	103	90	270	4 X 5/8" - 11	7,000
2108A 12	4"	52	215	120	90	270	8 X 5/8" - 11	8,100
2108A 13	5"	56	240	133	90	270	8 X ¾" - 10	10,900
2108A 14	6"	56	240	158	125	300	8 X ¾" - 10	14,000
2108A 16	8"	60	280	180	125	300	8 X ¾" - 10	19,400
2108A 18	10"	68	325	216	125	300	12 X 7/8" - 9	28,500
2108A 20	12"	78	351	251	150	***	12 X 7/8" - 9	49,600