


## Furnace Coolant Hose (non-conductive)

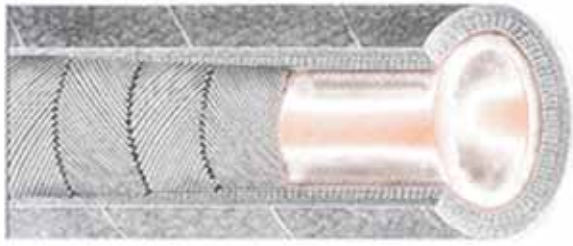

<b>Recommended for</b>	Conveyance of additives and coolant water in foundries where the hose is required to have electrically non-conductive properties and be resistant to a high temperature environment.	
<b>Temperature range</b>	Hose is protected against high temperature external environmental conditions (540°C) Liner is resistant to 150°C	
<b>Construction</b>	<b>Liner</b>	White, non-conductive EPDM compound
	<b>Reinforcement</b>	Multiple plies of synthetic fabric
	<b>Cover</b>	EPDM, non-conductive white with high-tensile, heat-resistant glass fibre cover
<b>Hose ends</b>	Plain	
<b>Lengths</b>	15 & 30m lengths	

Specifications		
Hose ID (mm)	Approx. OD (mm)	Rated WP (Bar)
Nom.		
13	25	10
20	33	10
25	42	10
32	49	10
38	56	10
51	69	10
63	85	10
76	99	10
90	112	10
100	126	10